




Full Body Harness Safety Lanyard

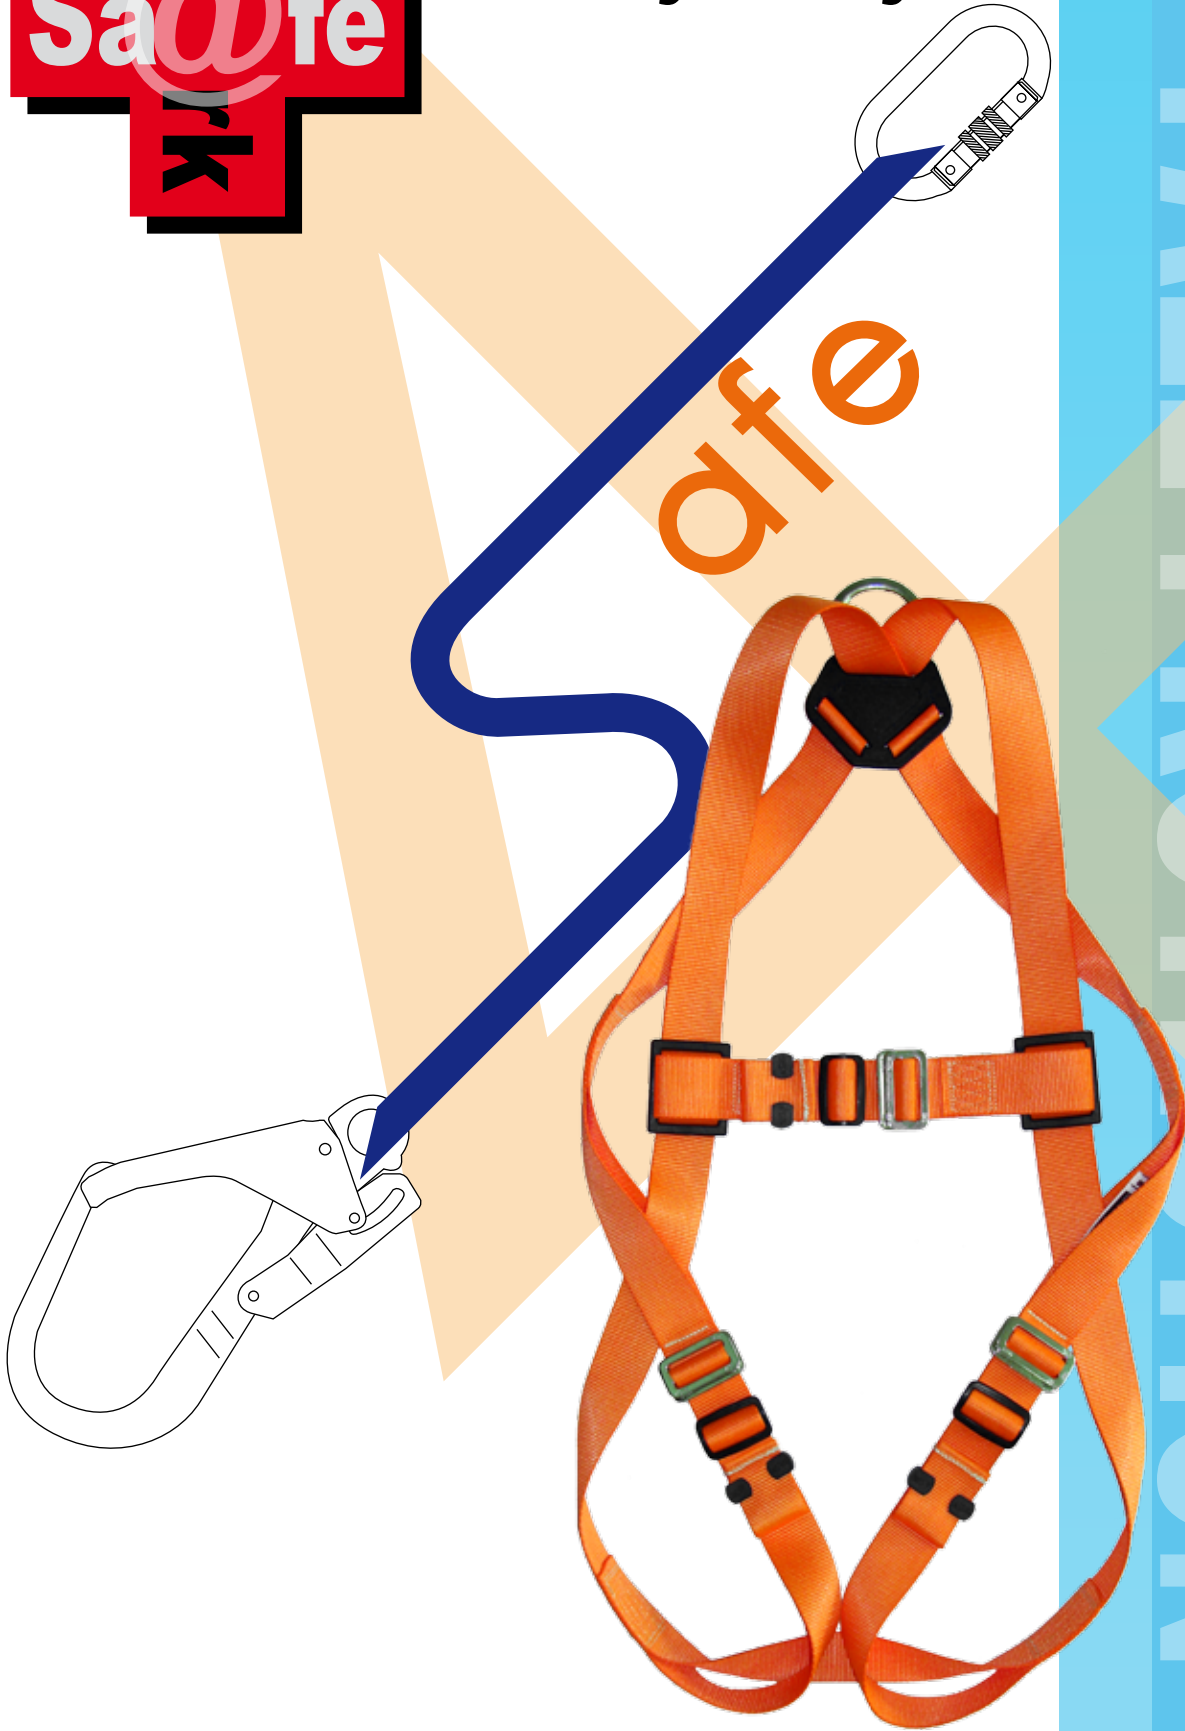

FALL PROTECTION

Full Body Harness



H101F

4Safe™ Model : H101F (CE approved version)

Size	: Universal
Max. Load Capacity	: 420 lbs/190 kgs
Webbing Material	: High Tenacity Polyester
Load Cap. on Webbing	: 5,000 lbs/22 kN
D-ring	: Forged alloy steel, LC 5,000 lbs/22 kN
Max. Arres Force	: 6 kN
Adjustment	: 3-Position
Certified Standard	: CE 0082 : EN 361:2002



H106F

4Safe™ Model : H106F


Size	: Universal
Max. Load Capacity	: 420 lbs/190 kgs
Webbing Material	: Nylon
Load Cap. on Webbing	: 5,000 lbs/22 kN
D-ring	: Sheet alloy steel, LC 5,000 lbs/22 kN
Max. Arres Force	: 6 kN
Adjustment	: 3-Position
Certified Standard	: EN 361:2002




H308F

4Safe™ Model : H308F

Size	: Universal
Max. Load Capacity	: 420 lbs/190 kgs
Webbing Material	: Nylon
Load Cap. on Webbing	: 5,000 lbs/22 kN
D-ring	: Sheet alloy steel, LC 5,000 lbs/22 kN
Max. Arres Force	: 6 kN
Adjustment	: 5-Position
Certified Standard	: EN 361:2002

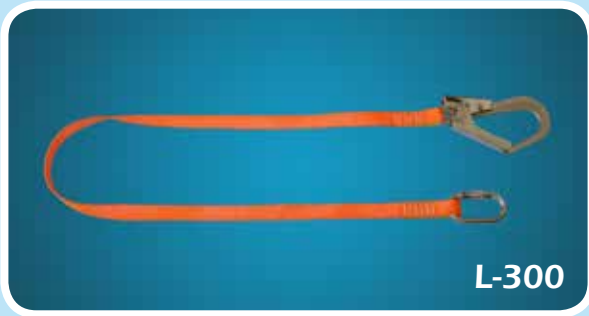

L-300

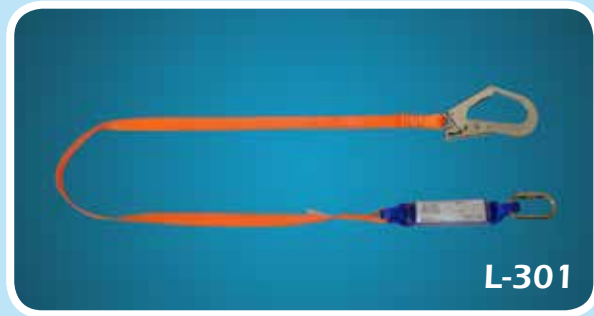

L-301



L-400



L-401

Absorber : N/A

Webbing : High Tenacity Polyester
: 25 mm. webbing width
: Safety Stitching by CAD protective
: B/S 2,500 kgs

Connectors : Safety Carabiner, Alloy steel, heat treated
: Safety Rebar Hook, Forged alloy steel
: 100% proof loaded 3,600 lbs/16 kN
: Meets ANSI Z-359.1, EN 362
: Nickle plated

System B/S : >1,500 kgf

Useful length : 1-legged, Length 2 M. ±10% (including hooks)
: 2-legged, Length 1.8 M. ±10% (including hooks)

Absorber : Nylon webbing
: 45 mm. webbing width
: Tear strap
: Impact force reduction <600 kgf

Webbing : High Tenacity Polyester
: 25 mm. webbing width
: Safety Stitching by CAD protective
: B/S 2,500 kgs

Connectors : Safety Carabiner, Alloy steel, heat treated
: Safety Rebar Hook, Forged alloy steel
: 100% proof loaded 3,600 lbs/16 kN
: Meets ANSI Z-359.1, EN 362
: Nickle plated

System B/S : >1,500 kgf

Useful length : 1-legged, Length 2 M. ±10% (including hooks)
: 2-legged, Length 1.8 M. ±10% (including hooks)



R-400

Rope : Nylon
: 15 mm. Diameter, braided rope
: Red and Blue wear indicator
: Safety stitching underneath protective sleeves

Connectors : Safety Carabiner, Galvanized steel, 18 mm.
: Safety Rebar Hook, Alloy steel
: 100% proof loaded 3,600 lbs/16 kN
: Meets EN 362

System B/S : >1,500 kgf

Useful length : 1-legged, Length 2 M. ±10% (including hooks)
: 2-legged, Length 1.8 M. ±10% (including hooks)



**Safety Belt
S-101**

Webbing : High Tenacity Polyester
: 45 mm. webbing width with 75 mm. supporter

Rope : Nylon, Length 2 M. ±10% (including hooks)
: 15 mm. Diameter, braided rope
: Safety stitching underneath protective sleeves

Connectors : Safety Rebar Hook, Alloy steel
: 100% proof loaded 3,600 lbs/16 kN
: Meets EN 362

System B/S : >1,200 kgf

Safety Lanyard



Full Body Safety Harness

4 Safe (TM) is registered brand for height safety body harness of Pacific Precise International who was built since 1978's. In 30 years experience, we develop our production combine with precise metal production, industrial high strength textile and body safety and comfort design. We have every parts or piece of 4 Safe harness produced in our production completely. Since 1992's, 4Safe has been certificated with BSI/ISO9002. and also being a member of

Technical Data

Max.Load Capacity : 420 lbs/190 kgs.
Webbing Material : High Tenacity Polyester
Load Capacity on webbing : 5,000 lbs/22 kN
D-ring : Alloy steel 4130, LC 5,000 lbs/22 kN

Certificate

Certification :
ANSI : Z359.1
OSHA : 1926.502
CSA : Z259.10

Our National laboratory

4Safe has the licensed laboratory which is specialist for fall arrest equipment testing. It assure that all production is under strict quality control and and safety requirement. We have

- 1) Fall Impact testing computer
- 2) 100 % Loading Capacity testing
- 3) Material Analysis
- 4) Tension test computer, 10T, 20T, 30T, 100T
- 5) Salt spray test
- 6) Hardness test
- 7) Polyester yarn tension test
- 8) Elasticity Test

Pacific Precise International Ltd.
Address: 330 South Big A Road Toccoa, GA 30577,
United States
E-mail Box: sales@ppi-4safe.com
Website: <http://www.ppi-4safe.com/>

ASIA(Distributors):
Taiwan: Pacific Precise International
Address: No. 66 1st, Road West, Chuaghsin Ind. Park,
Shengkang, Changhua 509, Taiwan
Tel: 886-4-7988100
Fax: 886-4-7988110

Malaysia(Distributors):
Secure Load Systems (M) Sdn. Bhd.
Tel: 60 65563792 60 65563793
Fax: 60 65563795
Lot 79 & 80, Kawasan Perindustrian Alor Gajah,
78000 Alor Gajah, Malacca, Malaysia

Thailand(Distributors):
TECHNICAL LIFT-ALL CO., LTD.
Address: 124/137/7 Moo 4 Tiwanon Rd.,
T.taladkwan, A.muang, Nonthaburi 11000 Thailand
Contact: Mr.Peter
Tel: +66-02-9681896
Fax: +66-02-9681899

Triumph Global
Tel: +971 4 3419158
Fax: +971 4 3419159
P.O Box : 282932, Dubai, UAE

Distributors :
TECHNICAL LIFT-ALL CO., LTD.
124/137/7 Moo 4 Tiwanon Rd., T. Taladkwan,
A.muang, Nonthaburi 11000 Thailand
Tel: 02-968-1896-8 Fax: 02-968-1899
www.liftall.co.th
E-mail : tliftall@ji-net.com

